



EVERIGHT crane scales



Wireless Crane Scale

Model: OCS-SWH2



Features

- ◆ Steel plate with heat-resistant material inside.
- ◆ Seamless steel pipe enclosure for maximum protection.
- ◆ Manu operation mode, calibration, saving, searching, peak hold, easy to operate.
- ◆ Indicator Adopts Σ - Δ A/D conversion technology.
- ◆ Weighing data save protection in case of power off.
- ◆ Battery charger with several protection modes to extend life of rechargeable battery.
- ◆ Standard RS232 communication interface(optional).
- ◆ Portable design, indicator packed in portable carry case, easy to operate outdoor.
- ◆ Gathering up to data records of 99 weighings, records can be sorted, searched.
- ◆ Power saving mode, indicator will turn off automatically after 30minutes with no operation.
- ◆ With 32 channels optional, so 32 crane scales can operated independently in the same airplace without interface.

Min Distance between Scale and High Temperature


1000℃	1200℃	1400℃	1600℃
1.6m	1.8m	2m	2.2m

Dimensions and Specifications

MODEL	Cap.(kg)	Resolution (kg)	A(mm)	C(mm)	E(mm)	H(mm)	Φ1(mm)	Φ2(mm)	G.W.(kg)
OCS-SWH2-1	1000	0.5	67	35	160	450	270	400	45
OCS-SWH2-2	2000	1	95	45	160	510	270	400	47
OCS-SWH2-3	3000	1	113	55	185	625	270	520	53
OCS-SWH2-5	5000	2	122	65	185	710	325	520	62
OCS-SWH2-10	10000	5	144	70	185	835	325	520	87
OCS-SWH2-15	15000	5	166	85	185	900	325	520	100
OCS-SWH2-20	20000	10	260	90	200	1055	325	620	130
OCS-SWH2-30	30000	10	285	100	220	1140	375	620	210
OCS-SWH2-50	50000	20	360	160	280	1680	450	750	575

Main technical data

Accuracy Standard	According to OIML class III
Display	LCD with backlight
Wireless Distance	Up to 200m without obstacle
Filtering	Low,Medium or High selectable
Resolution	2000 to 3000 divisions standard up to 15,000 available
Zero Range	Auto/Manual setting, from 4% to 100%F.S.
Tare Range	100% F.S.
Overload Indication	100% F.S. + 9e
Max. Safety Load	125% F.S.
Ultimate Load	700% F.S.
Scale Battery Type	DC 6V/4Ah rechargeable Ni-H battery
Indicator Battery	DC 4.8V/2.8Ah rechargeable Ni-H battery
Battery charger	Input:AC100-240V 50/60Hz Output:850mA
Operating Temperature Range	- 20℃ ~ + 50℃
Operating Humidity	≤85% RH under 20℃
Radio Frequency	433MHz

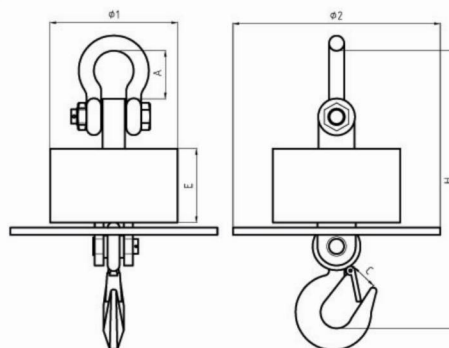

E-mail: info@everight.com.cn

Website: www.everight.com.cn



HANGZHOU EVERIGHT ELECTRONIC CO.,LTD